

72 TEETH DIGITAL TORQUE WRENCH


- ✓ No Tools Needed
- ✓ Weather-Proof
- ✓ Easy Install

SAVE THIS OWNER'S GUIDE FOR FUTURE REFERENCE

Specifications:

Model NO.	AM0609-01	AM0609-02	AM0609-03	AM0610
Accuracy	± 2 %	± 2 %	± 4 %	± 4 %
Square Driver	1/2 inch	3/8 inch	1/4 inch	1/4 inch
Range(Nm)	40 - 200	27 - 135	6 - 30	6 - 30
Digit	0.1	0.1	0.1	0.1
Memory	50 data sets of memory capacity			
Operation Modes	Peak or Trace			
Unit Selection	Kg-cm, Kg-m, lb-in, lb-ft, N-m			
Size(mm)	480 x 40 x 40	380 x 35 x 35	290 x 35 x 35	290 x 35 x 35
Weight	1.05 Kg	0.66 Kg	0.4 Kg	0.4 Kg
Battery	AAA DC1.5V x 2 pcs			
Operation Temperature	-10°C ~ 60°C (13.9°F ~ 139.9°F)			
Storage Humidity	-20°C ~ 70°C (-4°F ~ 157.9°F)			
Operation Humidity	15~90%			
Auto ShutOff	After 80 seconds of no use			



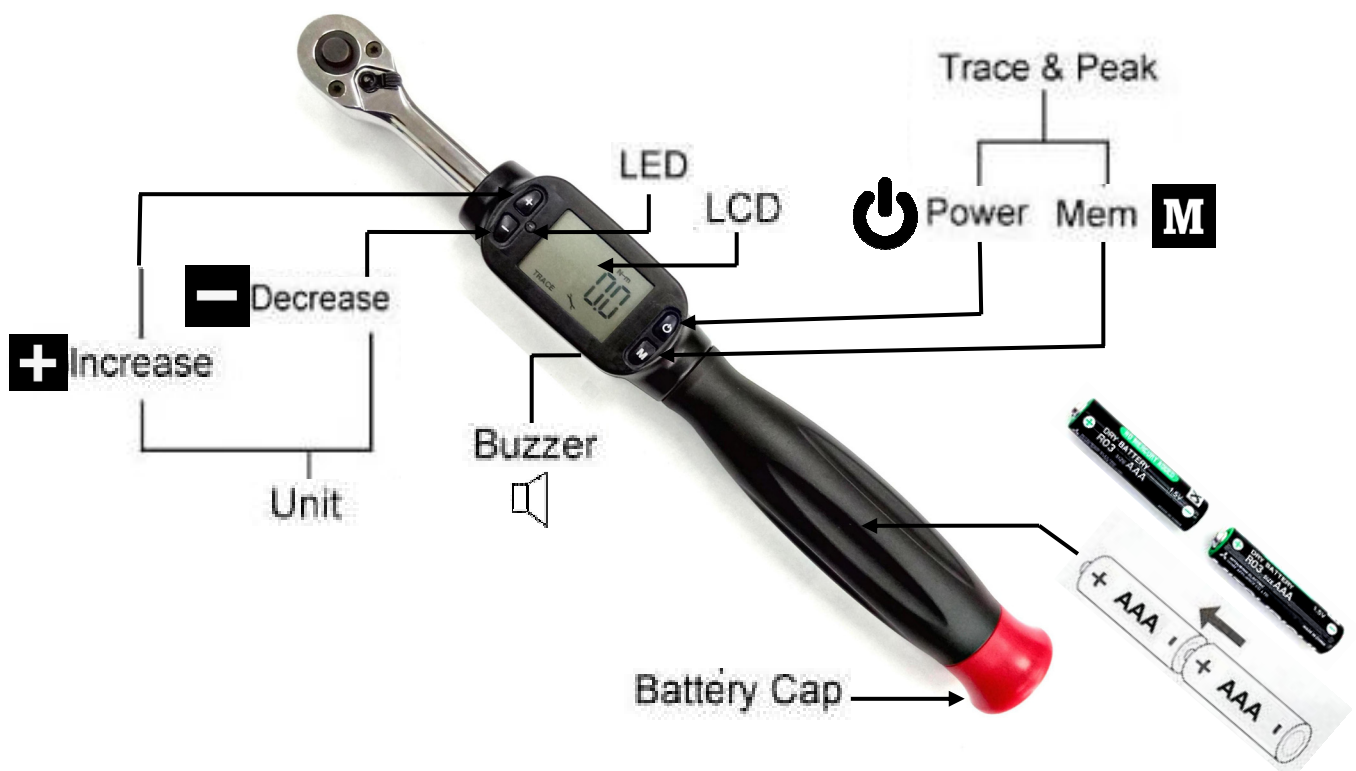













Read Owner's Guide before operating wrenches, Failure to follow instructions listed in this guide may result in damage of electrical system, wrong torque setting and/or serious injury




FEATURES

1. 50 data sets of memory capacity.
2. 2 LEDs red / green for visual alerting.
3. 72T Gear teeth.
4. Standard functions: torque setting, measurement setting, mode setting.
5. Operation in both clockwise and counter-clockwise directions.
6. LCD display shows kg/cm, kg/m, lb-in, lb-ft, N/m.
7. Audible torque confirmation by means of buzzer.
8. Easy to set up Peak or Trace modes.
9. Anti-slip soft grip

Function Settings

1. Battery >>> Install and change batteries: Open the end cap then insert 2-AAA batteries (positive end first) into compartment, tighten the cap.
2. "  " >>> Switch on/off the power
Press the power  button for 3 seconds will turn on the LCD screen and buzzer.
There is two modes " TRACE " " PtoP " to use, when switch is done. The LCD will show one of the mode and digit 00.0.Pr. LCD will display both torque unit and value.
3. Set Torque Unit Selection: kg/cm, kg/m, lb-in, lb-ft, N/m
Please press the  ,  button at the same time and release them to select different torque unit.
4. Set Torque Vaule
Press the  ,  button to apply a right value then release it to set up torque, the value will be memorized after flashing 10 seconds then LCD will show 00.0 automatically.
5. Peak Hold/Track Mode Operation
Press  &  at same time then release it to get " PtoP " peak hold set up mold, then press "" , "" to set up the torque, press  &  in the same time again to get " TRACE " trace mode then use "" , "" to set up torque.
6. Backlight funtion
When power is on, click  power button to turn on/off backlight
7. Auto shutoff
The power will auto shutoff after 80 seconds of on use.
8. Memory function
Please stay at peak hold mode " PtoP " then press Mem  for one second then release it to set up the memory P01~P50 , there are 50 data of memory capacity cycling.

Note

1. If the  battery capacity is low, a battery symbol will be displayed on the screen to remind you to change new batteries.
2. If the wrench not in use for a period of time, remove the batteries from compartment
3. The battery life is not only decide by its quality but also the last of acting flash, buzzer and backlight.

WARNING!

Please use the wrench in a clean and dry place.
Do not use organic solvents to clean the wrench.
Clean the wrench and LCD panel with a soft dry cloth.
Keep children and the disabled away from working area.
Do not use the wrench with any liquid.
Do not use the wrench over its torque range.
Remove the batteries to avoid the wrench damage.
Do not disassemble the wrench, shake or drop it.
Do not leave the wrench at place of over-heating, humidity or direct sun.

BATTERIES

Do not mix old and new batteries with product
Do not mix alkaline batteries with carbon zinc or rechargeable
Lithium-ion (Li-ion) batteries
Do not install batteries backwards
Do not throw batteries into fire. Batteries can explode or leak causing personal injury
Remove batteries when storing product for a long period of time. Batteries should be stored at room temperature